

O2E

OPTICAL TO ELECTRICAL CONVERTER

SPECIFICATION SHEET

AVAILABLE IN PXI

AVAILABLE IN MatriQ

The O2E is a high bandwidth, broadband optical to electrical converter available in a range of configurations.




Various wavelength ranges

The O2E can be customized to a wide range of wavelengths and is suitable for single mode and multimode applications.



High bandwidth

Our high performing O2E allows you to successfully test high baudrate signals with up to 50GHz of bandwidth.




Calibrated readings

Onboard storage of calibration data can be accessed via SCPI commands, making it easier to generate calibrated measurements and scale your measurement capabilities.



Amplified RF output

Various conversion gain options allow you to easily measure low power, high speed optical signals



DC or AC coupled

Choose from DC or AC coupling to suit your specific test application.

TARGET APPLICATIONS

- Optical signal eye diagram measurement
- Relative intensity noise (RIN) measurement
- Optical pulse characterization
- Modulation depth measurement
- Extinction ratio measurement
- Precision timing/triggering
- Frequency response measurement of devices

Our expanding range of PXIe optical test solutions are used by customers in mixed-signal test and measurement systems, reducing complexity, lowering the cost of test and accelerating time to market.

- Multi vendor, open standard with over 1500 PXI modules available
- Advanced timing and synchronization capabilities across instruments
- Low latency, high performance processing and fast data throughput
- Design and build scalable, high channel count systems
- Small footprint and lower power consumption




The MATRIQ series provides the same high-performance test capabilities of our PXIe modules in an compact benchtop design. MATRIQ instruments are simple to setup and easy to operate, making them the perfect choice for your optical lab or test bench.

- Same performance and control as our PXIe modules
- Plug and play with USB or Ethernet connectivity
- Control via the web-based GUI, COHESIONUI, LabVIEW or SCPI commands
- Compact and portable design saves benchtop space




O2E TECHNICAL SPECIFICATIONS

PXI - MODULAR

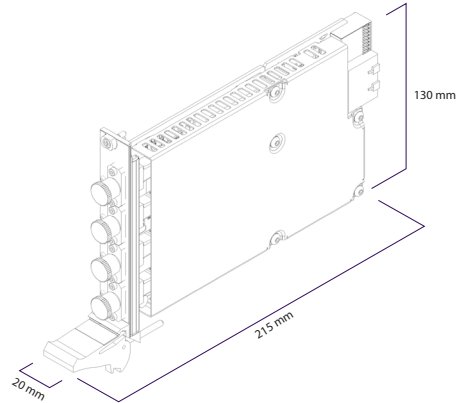


O2E-1001-2-FC-PXIE

MATRIQ - COMPACT & PORTABLE

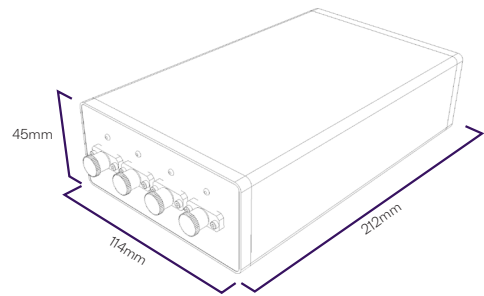

O2E-1001-2-FC-MTRQ

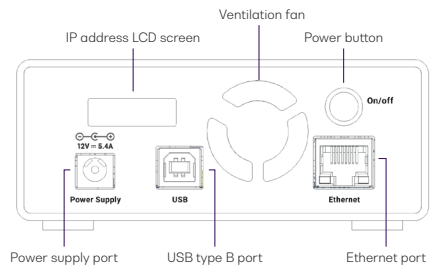

O2E TECHNICAL SPECIFICATIONS

General Specifications	PXI	MATRIQ
Bus connection	PXIe	USB and Ethernet
PXI slots	1	-
Dimensions (HxWxD)	130 mm x 20mm x 215 mm 5.1" x 0.8" x 8.5"	45 x 114 x 212 mm 1.7 x 4.5 x 8.3 inch
Weight	~ 1 kg ~2.2 lbs	~ 1.1 kg ~ 2.4 lbs
Operating temperature range	5 °C to 45 °C 41 °F to 113 °F	5 °C to 45 °C 41 °F to 113 °F
Storage temperature range	-40 °C to 70 °C -40 °F to 158 °F	-40 °C to 70 °C -40 °F to 158 °F

Model Number	1001	1101	1001	1101
Bandwidth	9.5 GHz (typ) 8.5 GHz (min)	25 GHz (typ) 24 GHz (min)	9.5 GHz (typ) 8.5 GHz (min)	25 GHz (typ) 24 GHz (min)
Wavelength	750 to 1650nm	950 to 1650nm	750 to 1650nm	950 to 1650nm
Calibrated wavelengths	850, 1310, 1490, 1550	1310, 1490, 1550	850, 1310, 1490, 1550	1310, 1490, 1550
Optical connector type	FC/PC, FC/APC, SC/APC, SC/PC	FC/PC, FC/APC, SC/APC, SC/PC	FC/PC, FC/APC, SC/APC, SC/PC	FC/PC, FC/APC, SC/APC, SC/PC
Number of channels	1 or 2	1 or 2	1 or 2	1 or 2
RF coupling	DC	AC	DC	AC
RF connector	SMA (3.5 mm)	K (2.92 mm)	SMA (3.5 mm)	K (2.92 mm)
RF impedance	50 ohms	50 ohms	50 ohms	50 ohms
Fiber	62.5μ core MMF	SMF-28	62.5μ core MMF	SMF-28
Damage level peak power	+7 dBm	+4 dBm	+7 dBm	+4 dBm
Optical return loss	30 dB SMF1 16 dB MMF	30 dB SMF1	30 dB SMF1 16 dB MMF	30 dB SMF1
PDL at 1550 nm		0.25 dB (max)		0.25 dB (max)
Conversion gain	430 V/W (typ) at 1550 nm 450 V/W (typ) at 1310 nm 250 V/W (typ) at 850 nm	900 V/W (typ) at 1550 nm	430 V/W (typ) at 1550 nm 450 V/W (typ) at 1310 nm 250 V/W (typ) at 850 nm	900 V/W (typ) at 1550 nm
Low frequency cutoff	0 Hz	< 100 KHz	0 Hz	< 100 KHz
Noise equivalent power	0.15 fW/Hz	0.18 fW/Hz	0.15 fW/Hz	0.18 fW/Hz
Average power reading	Yes	Yes	Yes	Yes

Model Number	1201	1301 ²	1201	1301 ²
Bandwidth	35 GHz (typ) 30 GHz (min)	50 GHz (typ)	35 GHz (typ) 30 GHz (min)	50 GHz (typ)
Wavelength	800 to 1650nm	1200 to 1650nm	800 to 1650nm	1200 to 1650nm
Calibrated wavelengths	850, 1310, 1490, 1550	1310, 1490, 1550	850, 1310, 1490, 1550	1310, 1490, 1550
Optical connector type	FC/PC, FC/APC, SC/APC, SC/PC	FC/PC, FC/APC, SC/APC, SC/PC	FC/PC, FC/APC, SC/APC, SC/PC	FC/PC, FC/APC, SC/APC, SC/PC
Number of channels	1 or 2	1 or 2	1 or 2	1 or 2
RF coupling	DC	DC	DC	DC
RF connector	2.4 mm	V (1.85 mm)	2.4 mm	V (1.85 mm)
RF impedance	50 ohms	50 ohms	50 ohms	50 ohms
Fiber	50µ core MMF	SMF-28	50µ core MMF	SMF-28
Damage level peak power	+8 dBm	+8 dBm	+8 dBm	+8 dBm
Optical return loss	24 dB SMF1 14 dB MMF	30 dB SMF1	24dB SMF1 14 dB MMF	30 dB SMF1
PDL at 1550 nm	-	0.1dB (typical) 0.2 dB (max)	-	0.1dB (typical) 0.2 dB (max)
Conversion gain	100 V/W (typ) at 1550 nm 100 V/W (typ) at 1310 nm 70 V/W (typ) at 850 nm	90 V/W (typ) at 1310 nm	100 V/W (typ) at 1550 nm 100 V/W (typ) at 1310 nm 70 V/W (typ) at 850 nm	90 V/W (typ) at 1310 nm
Low frequency cutoff	0 Hz	0 Hz	0 Hz	0 Hz
Noise equivalent power	0.18 fW/Hz	0.16 fW/Hz	0.18 fW/Hz	0.16 fW/Hz
Average power reading	Yes	Yes	Yes	Yes

Model Number	1401	1402	1401	1402
Bandwidth	9GHz (typ) 8GHz (min)	9GHz (typ) 8GHz (min)	9GHz (typ) 8GHz (min)	9GHz (typ) 8GHz (min)
Wavelength	750 to 1650nm	750 to 1650nm	750 to 1650nm	750 to 1650nm
Calibrated wavelengths	1271, 1291, 1311, 1331, 1351, 1371, 1391, 1411, 1310, 1490, 1550	850, 1310, 1490, 1550	1271, 1291, 1311, 1331, 1351, 1371, 1391, 1411, 1310, 1490, 1550	850, 1310, 1490, 1550
Optical connector type	FC/PC, FC/APC, SC/APC, SC/PC	FC/PC, FC/APC, SC/APC, SC/PC	FC/PC, FC/APC, SC/APC, SC/PC	FC/PC, FC/APC, SC/APC, SC/PC
Number of channels	1 or 2	1 or 2	1 or 2	1 or 2
RF coupling	AC	AC	AC	AC
RF connector	SMA	SMA	SMA	SMA
RF impedance	50 ohms	50 ohms	50 ohms	50 ohms
Fiber	62.5 µ core MMF	62.5 µ core MMF	62.5 µ core MMF	62.5 µ core MMF
Damage level peak power	+7 dBm	+7 dBm	+7 dBm	+7 dBm
Optical return loss	16 dB	16 dB	16 dB	16 dB
PDL at 1550 nm	-	-	-	-
Conversion gain	10,000 V/W (typ) 7,000 V/W min at 1310nm	10,000 V/W (typ) 7,000 V/W min at 1310nm	10,000 V/W (typ) 7,000 V/W min at 1310nm	10,000 V/W (typ) 7,000 V/W min at 1310nm
Low frequency cutoff	< 100 KHz	< 100 KHz	< 100 KHz	< 100 KHz
Noise equivalent power	0.26p W/Hz	0.26p W/Hz	0.26p W/Hz	0.26p W/Hz
Average power reading	Yes	Yes	Yes	Yes

Notes

1. SMF at 1550 nm

2. Preliminary specs

ORDERING INFORMATION

O2E - XXXX - X - XX - PXIE
O2E - XXXX - X - XX - MTRQ

Model number

- 1001** = 9.5 GHz, DC coupled,
conversion gain of 430 V/W
- 1101** = 25 GHz, AC coupled,
conversion gain of 900 V/W
- 1201** = 35 GHz, DC coupled,
conversion gain of 100 V/W
- 1301** = 50 GHz, DC coupled,
conversion gain of 90 V/W
- 1401** = 9 GHz, AC coupled,
conversion gain of 7000 V/W, CWDM8 calibration
- 1402** = 9 GHz, AC coupled,
conversion gain of 7000 V/W

Connector type

- FC** = FC/PC
- FA** = FC/APC
- SC** = SC/PC
- SA** = SC/APC

Number of channels

- 1** = 1 channel
- 2** = 2 channels

WARRANTY INFORMATION

This product comes with a standard 3 year warranty.

An optional 5 year extended warranty is also available, please discuss with your sales representative at the time of purchase.

Our portfolio of optical and electrical test modules is rapidly expanding to meet a wide range of customer requirements and applications.

Tunable Laser Sources

Versatile telecom laser sources with full tunability across C or L bands. Narrow 100 kHz linewidth, up to 16.5 dBm of power, optional whisper mode to disable frequency dither.

Erbium-Doped Fiber Amplifier (EDFA)

High power Erbium-Doped Fiber Amplifier for signal power amplification in C and L bands with various control modes, including automatic gain control.

Fixed Wavelength Laser Sources

Highly customizable DFB or FP laser sources available in a wide range of wavelengths and powers. Models support SMF, MMF and PMF.

Variable Optical Attenuator (VOA)

Fast attenuation speed with low insertion loss and built-in power monitoring. Operates in fixed attenuation or constant output power modes. Models support SMF, MMF and PMF.

Optical Power Meters

Fast terminating or inline monitoring of optical signal power from -60 to +10 dBm across 750 – 1700 nm wavelengths. Model with logarithmic analog output for applications such as silicon photonics fiber alignment.

Optical Spectrum Analyzer (OSA)

Low cost, fast spectral measurement in a compact module with built-in analysis including SMSR, OSNR and spectral width. Targeted wavelengths for specific applications in O band, C band and L band.

Optical-to-Electrical Converter

High bandwidth, broadband O-to-E converter. Available in a range of configurations; choose from 1 or 2 channels, AC or DC coupling and various conversion gain and operating wavelength ranges.

Bit Error Rate Tester (BERT)

2 or 4-channel Pulse Pattern Generator and Error Detector at rates up to 29 Gbps for the design, characterization and production of optical transceivers and opto-electrical components.

Pulse Pattern Generator (PPG)

4 channel Pulse Pattern Generator from 0.3 to 30 Gbps for high-density multichannel applications. With integrated clock synthesizer and programmable de-emphasis and CTLE processor.

Optical Switch

Proven reliability and fast switching time. Wide variety of switch configurations: 1x4, 1x16, 16x16 and more. Models support SMF, MMF and PMF.

Polarization Controller & Scrambler

High-speed automated polarization control with broad wavelength coverage from 1260nm to 1650nm, low insertion loss and back reflection. Full remote control via intuitive GUI, LabVIEW or SCPI.

Photonic Doppler Velocimeter (PDV)

Purpose-built module for Photonic Doppler Velocimetry (PDV). A circulator, two VOAs and a passive coupler all built into one compact module.

Passive Component Integration

Integrate passive optical components of your choice such as WDM couplers, splitters, band-pass filters, PM beamsplitters and circulators. Models support SMF, MMF and PMF.

Passive Component Storage

Protect and store your own passive fiber optic components such as splitters, connector adaptor patchcords, WDM couplers, and isolators in one handy module.

PXI – TEST MODULES

MATRIQ – TEST MODULES

We provide these products as PXIe modules and compact MATRIQ benchtop instruments.

See our website for more details
[quantifiphotonics.com/products](https://www.quantifiphotonics.com/products)

Test. Measure. Solve.

Quantifi Photonics is transforming the world of photonics test and measurement. Our portfolio of optical and electrical test instruments is rapidly expanding to meet the needs of engineers and scientists around the globe. From enabling ground-breaking experiments to driving highly efficient production testing, you'll find us working with customers to solve complex problems with optimal solutions.

To find out more, get in touch with us today.

General Enquiries
Technical Support
Phone
North America

sales@quantifiphotonics.com
support@quantifiphotonics.com
+64 9 478 4849
+1-800-803-8872



[quantifiphotonics.com](https://www.quantifiphotonics.com)

QUANTIFI
PHOTONICS™